


DATASHEET / SPECIFICATION

CS-6 & CS-8, Super Indexing Spacer

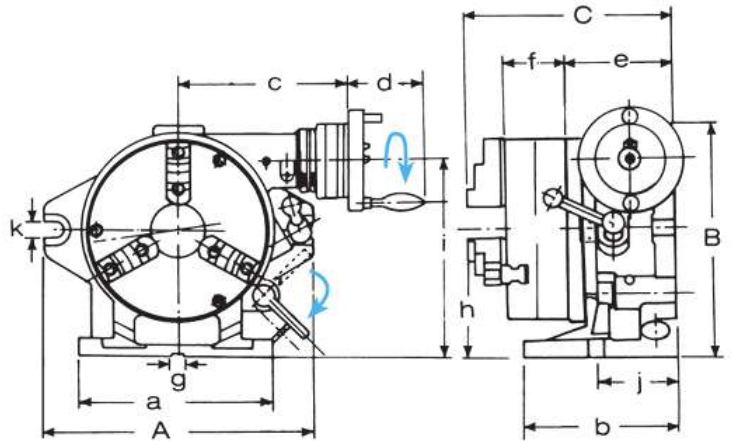

Specifications

Unit:mm

ORDER NO.	Numbers of dividing	Chuck Through Hole				Diameter of hole (turret)	Face plate		A	B	C	a
		Outer diameter	Inner jaw	Outer jaw	Inner dia		Outer dia	Thickness				
CS-6	2, 3, 4, 6 8, 12, 24	160 VSK-6A	4~42	10~156	44	44	203	50	250	235	221	176
CS-8		210 VSK-8A	4~62	10~180	58	63	254	58	310	285	243	225

ORDER NO.	b	c	d	e	f	g	h	i	j	k	Gross Weight kgs	Meas. CFT	CODE NO.
CS-6	150	184	82	112	66	16	123	186	80	18	(C)43.6	1.2	1001-060
CS-8	160	201	82	125	75	16	155	232	96	18	(W)78.3	3.1	1001-061

(W)Wooden Case (C)Carton Case

Standard Accessories



Masking Plate



Face Plate



DP-4

TS-2 for CS-6
TS-3 for CS-8




The state of CS-8
fitted with Face Plate
& Dividing Plate



New Model

SPECIFICATIONS	CS-6 CC-6	CS-8 CC-8
Degree per one handle rotation	4°	4°
Scale of micro collar	2'	1'
vernier reading	20"	10"
Gear ratio	1:90	1:90

Optional Accessories: 3-Jaw Powerful Self-Centering Chuck

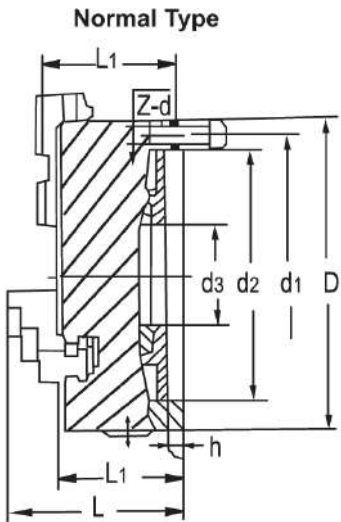

3 JAW SELF CENTERING CHUCK REVERSIBLE TOP JAWS. PLAIN BACK

SPECIFICATIONS

Unit:mm

ORDER NO.	D-Size	d1	d2	d3	L	L1	h	THREAD	GRIPPING RANGE		WEIGHT (kgs)	CODE NO.
									O.D. RANGE	I.D. RANGE		
VSK-6A	160mm(6")	142	130	45	95	71	5	3-M8	Ø8-Ø160	Ø55-Ø150	8.3	5002-040A
VSK-8A	200mm(8")	180	165	65	109	78	5	3-M12	Ø8-Ø180	Ø62-Ø170	16	5002-042A